


High Current Switches

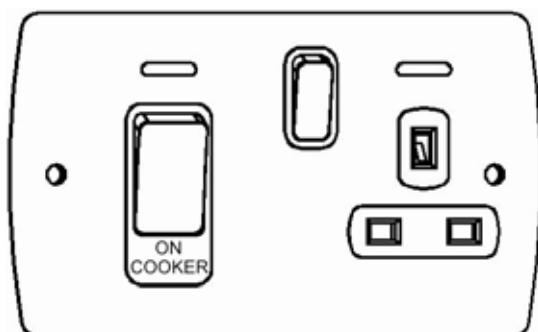

Description

This uniquely styled range is easy to install, with coloured terminals, clear white terminal markings and is supplied in individual display boxes.

Features

- 1.5mm thick front plate
- concave rockers
- clear white terminal markings
- colour coded terminals
- grey font engraving
- discreet neon
- neon leads enclosed
- 2 earth terminals
- terminals have large lead-ins
- protective film on frontplates
- 10 year guarantee

Range

	Square Plate	Curved Plate
45A DP, neon	8160	8360
45A DP tall, neon	8152	8352
Cooker Control Unit	8154	8354
20A DP, neon	8156	8356

• prefix with finish and insert colour

Finishes

Chrome (CH)	with white or black inserts
Satin Chrome (SC)	with white or black inserts
Gold (GD)	with white inserts

Technical Specification

voltage rating	250Vac
current Rating	45A or 20A
contact gap	3mm

no user serviceable parts

Back Boxes

minimum recommended depth

	flush 35/46mm	dry lining 35/46mm
20A	DB164	DB2540
45A	DB167	DB2543

Standards

- BS EN 60669-1 : 2000

Terminal Capacity

L & N	2.5mm ²	4mm ²	6mm ²	10mm ²
20A	4	2	1	1
45A	-	3	2	1

DETA

Kingsway House, Laporte Way
Luton, Beds LU4 8RJ

Tel. +44 1582 544 500 Fax: +44 1582 544 501
Technical Helpline +44 1582 544 548