


## Cooker Control Units

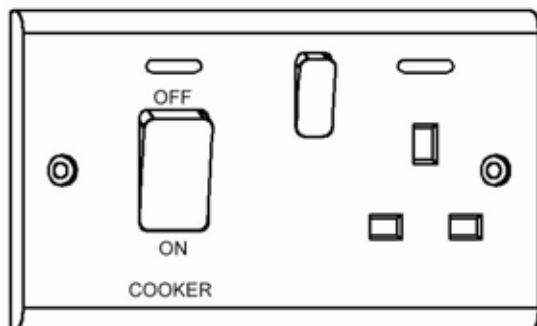

### Description

This uniquely shaped range, in the Deta Slimline style, is easy to install with coloured terminals, clear white terminal markings and is supplied in individual protective bags.

This wide range includes neon versions, and an option of red or white switches.

### Features

- unique slim profile with curved top and bottom edges
- concave rockers
- switches rated at 45A
- only one size 4mm screwdriver needed
- clear white terminal markings
- colour coded terminals
- neon versions available
- 2 earth terminals
- terminals have large lead-ins
- 20 year guarantee

### Range

|  |        |
|--|--------|
| cooker control unit – red switch         | S1302  |
| cooker control unit – white switch       | S1312  |
| cooker control unit, neon – red switch   | S1302P |
| cooker control unit, neon – white switch | S1312P |
| 45A cooker cable outlet                  | S1217  |

### Technical Specification

|                |        |
|----------------|--------|
| voltage rating | 250Vac |
| current Rating | 45A    |
| contact gap    | 3mm    |

no user serviceable parts

### Back Boxes

minimum recommended depth

|    | flush<br>47mm | dry lining<br>46mm | surface<br>46mm |
|----|---------------|--------------------|-----------------|
| 2g | DB168         | DB2543             | V1229           |

### Standards

- BS 4177

### Terminal Capacity

|       | 6mm <sup>2</sup> | 10mm <sup>2</sup> |
|-------|------------------|-------------------|
| L & N | 2                | 1                 |

**DETA**

Kingsway House, Laporte Way  
Luton, Beds LU4 8RJ

Tel. +44 1582 544 500 Fax: +44 1582 544 501  
Technical Helpline +44 1582 544 548